

Dodge Crew

Install Instructions

ALL YEARS

1. Remove rear outside seat rail bolt of passenger front seat.
2. Remove passenger front seat belt.
3. Remove clothes hook passenger side rear.
4. Remove passenger rear headrest.
5. Bolt upper side screen to lower side screen.
6. Install the upper front screen bracket and tighten.
7. Install the lower floor bracket to the front screen, hand tighten only.
8. Install foam tube with zip ties from top to the plate steel.
9. Place the side screen in the vehicle and install the lower 2" bracket to the rear of the side screen and re-install the headrest.
10. Install the upper rear side screen bracket and align right next to the hole left by the clothes hook fastener.
11. Loosely install the floor bracket to the side screen.
12. Place the front screen in the vehicle and loosely attach to the side screen.
13. Attach upper front screen bracket to the seat belt then replace seatbelt harness.
14. Install the floor bracket to the seat rail.
15. After squaring the entire cage to the pillar post and to the rear seat area, attach the upper rear side screen bracket right next to the fastening point of the clothes hook using the tap screw provided.
16. Tighten all bolts.
17. Use the passenger seat and push back to secure the side screen to the rear seat, fasten the floor bracket to the driveshaft hump.


Custom Cage
6102 N 23Rd St.
Ozark, MO 65721
(605) 642-7609

E-MAIL CUSTOMCAGE@RUSHMORE.COM

WWW.POLICECAGES.COM

www.facebook.com/CustomCageInc

Dodge Crew Install Instructions ALL YEARS

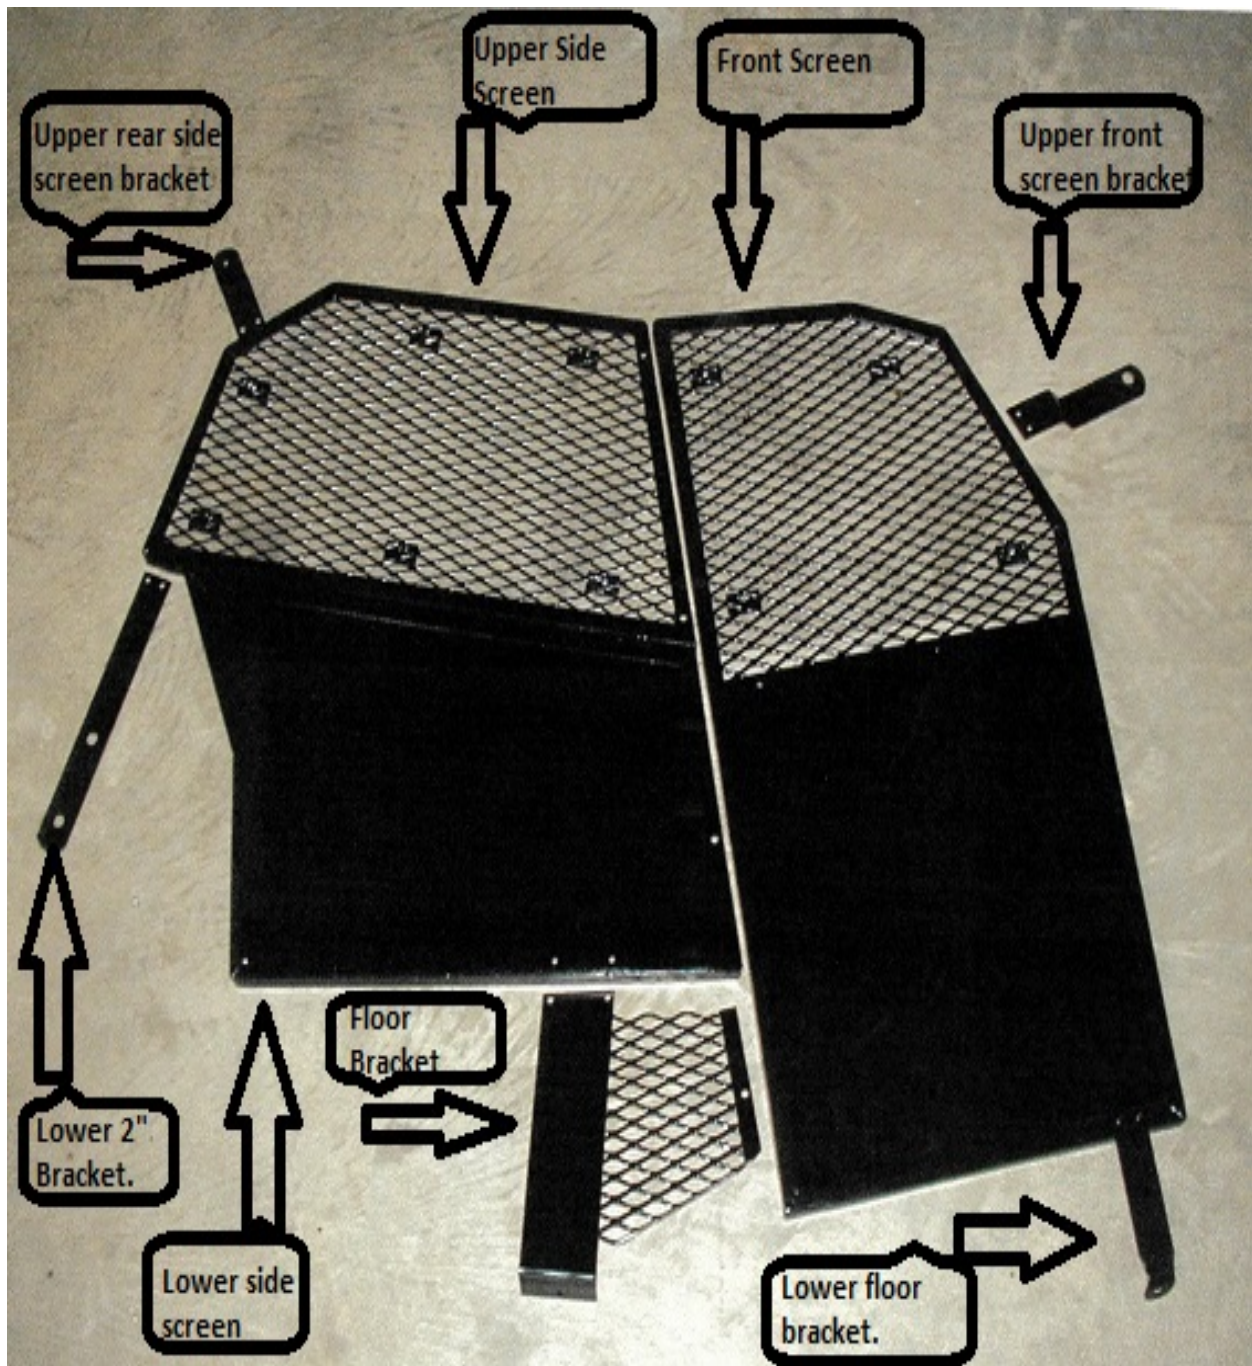

Custom Cage
6102 N 23Rd St.
Ozark, MO 65721
(605) 642-7609

E-MAIL CUSTOMCAGE@RUSHMORE.COM

WWW.POLICECAGES.COM

www.facebook.com/CustomCageInc